



键盘用户手册

5075  

User Manual
Benutzerhandbuch


快速开始指南 ▶
Quick Guide

感谢您购买及使用本产品



为了给您带来更好的使用体验，在使用产品前请仔细阅读本说明书，并请妥善保管，以便日后参观。

包装内容

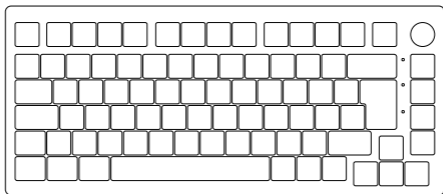

系统需求

Windows®XP / Vista / 7 / 8 / 10或更高版本


安装步骤

将键盘USB连接线插入电脑的USB接口即可开始使用。

独立指示灯

状态	指示灯位置	回连	配对	连接成功
BT1	按键E灯	蓝色慢闪	蓝色快闪	蓝灯常亮2s熄灭
BT2	按键R灯	蓝色慢闪	蓝色快闪	蓝灯常亮2s熄灭
BT3	按键T灯	蓝色慢闪	蓝色快闪	蓝灯常亮2s熄灭
2.4G	按键Y灯	绿色慢闪	绿色快闪	绿灯常亮2s熄灭
有线	按键U灯	无	无	红灯常亮2s熄灭
状态	指示灯位置	指示方式		
低电	独立指示灯2	红灯慢闪		
充电	独立指示灯2	绿灯常亮		
充满	独立指示灯2	灯灭		
Caps	独立指示灯1	白光常亮		
锁WIN	独立指示灯3	白光常亮		

5075B Plus 组合键功能

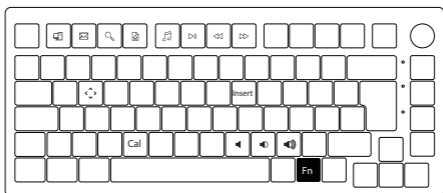


Fn+	F1	=	我的电脑
	F2		电子邮件
	F3		Windows搜索
	F4		浏览器主页
	F5		多媒体播放器

Fn+	F6	=	播放 / 暂停
	F7		上一首
	F8		下一首
	C		计算器
	M		静音

Fn+	I	=	INS
	<		音量减小
	>		音量增加
	W		将 W A S D 与 ↑ ↓ ← → 键对调

5075B Plus 系统功能 (Windows)

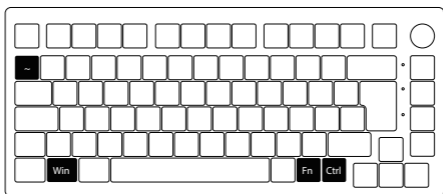

锁Win键

Fn + 左Win


恢复出厂设置

长按 Fn + ~ 3秒

切换菜单键


长按 Fn + 右Ctrl 3秒

5075B Plus 系统功能 (Mac)

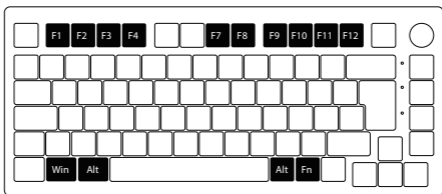


F1	降低显示屏亮度	F7	上一曲	F11	调低音量
F2	增加显示屏亮度	F8	播放/暂停	F12	调高音量
F3	开放任务控制	F9	下一曲	左Win	Option
F4	呼出Siri	F10	静音	左Alt	Command
右Alt	Command				

5075B Plus 灯光调节

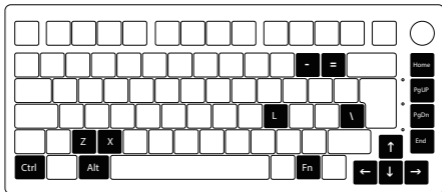


FN+-	灯光速度变慢	FN+Home	常亮、涟漪、如影随形、川流不息、流星
FN+=	灯光速度变快	FN+PGUP	繁星点点、霓虹、光波、层出不穷、彩泉涌动
FN+↑	灯光变亮	FN+End	呼吸、极光、正弦波、雨滴、峰回路转
FN+↓	灯光变暗	FN+PGDW	斜风细雨、踏雪无痕、聚合、一石二鸟、百花争艳
FN+←	灯光方向向左	FN+\	切换背光至7种单色+RGB循环
FN+→	灯光方向向右	FN+Alt	切换侧光至7种单色+RGB循环
FN+L	灯光关闭/开启	FN+左Ctrl	侧边灯光模式切换, 包括关闭 共6种
FN+Z	侧边灯光亮度切换,5档,循环		
FN+X	侧边灯光速度切换, 5档, 循环		

5075B Plus 连接使用指南

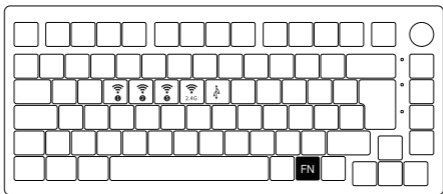

Fn+	E	蓝牙设备1	短按回连蓝灯慢闪； 长按配对蓝灯快闪	
	R	蓝牙设备2		
	T	=	蓝牙设备3	
	Y		2.4G无线设备	短按回连绿灯慢闪； 完成匹配后恢复灯效
	U		有线模式	

 背面开关示意
左：Windows(内置电源开)
中：默认Mac (内置电源关)
右：Mac (内置电源开)

蓝牙配对

键盘开机后，按下FN+E/R/T进入蓝牙模式，长按FN+E/R/T组合键3S，键盘进入对码状态，蓝色指示灯快闪，连上后指示灯常亮2S，如果没有连上设备指示灯熄灭，键盘进入睡眠。

2.4G配对

键盘开机后，按下FN+Y进入2.4G模式，再按下FN+Y组合键3S进入配对模式后，插入接收器，指示灯快闪，配对成功后退出对码，模式灯常亮2S，找不到配对设备30s后，退出对码模式灯熄灭，键盘进入睡眠。

电量查询

按下组合键Fn+空格，电量低于30%空格键上红光；30-50% 空格键上提示为橙色；50-70 空格键上提示为紫色；70-90% 空格键上提示为黄色；90-100% 空格键上提示为绿色。

按键/灯光自定义说明和调用说明

1. 键盘三种工作模式下均可连接驱动并进行灯光和按键自定义
2. 键盘三种工作模式下可搭配驱动实现音乐律动
3. 请在我司官网下载"Akko Cloud"驱动
4. 驱动下载地址www.akkogear.com

Akko保修和服务声明

1. Akko为中国大陆的客户提供一个保修。对于其他地区，请联系您的卖家（Akko分销商）以了解具体的保修政策。
2. 如果保修期到期，客户需要支付维修费用。如果用户喜欢自己修理键盘，Akko也会提供说明。用户应对自行修复过程中发生的任何损失承担全部责任。
3. 在未经制造商/卖方指示的情况下拆开键盘将立即导致保修无效
4. 官方售后服务时间为每周一至周五上午10:00至下午18:00
节假日以国家法定节日休息为准。
5. 退货和保修政策在不同的平台上可能有所不同，并在购买时取决于具体的经销商。

公司：深圳银宸科技有限公司

地址：深圳市宝安区松岗街道碧头第一工业区朗碧路33号

电话：0755-23216420

网址：www.akkogear.com

产地：中国·深圳

Company: Shenzhen Yinchen Technology Co., Ltd

Address: 33 Langbi Rd, Bitou First Industrial Zone, Bao'an District, Shenzhen, China



WARNING:

Water and Beverages can't be poured into the Keyboard.




中国制造/Made in China

**注意
事项**

人为损坏不局限于键盘进水、高处坠落、过度用力拉扯线材等，键盘为电子产品请按照电子产品保护方式爱惜使用。

To provide you with a better user experience, please read this manual carefully before using the product.

Packing List

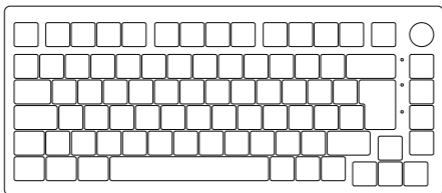

System Requirement

Windows®XP / Vista / 7 / 8 / 10 or higher version


Connectivity Method

Connect the keyboard to your computer by plugging in the USB cable into an available USB port to start using it.

LED Indicators

Status	Indicator	Re-Connecting	Pairing	Connected
Bluetooth device 1	LED for Key E	Blue light blinks slowly	Blue light blinks fast	Blue light stays on for 2 seconds and then turns off
Bluetooth device 2	LED for Key R	Blue light blinks slowly	Blue light blinks fast	Blue light stays on for 2 seconds and then turns off
Bluetooth device 3	LED for Key T	Blue light blinks slowly	Blue light blinks fast	Blue light stays on for 2 seconds and then turns off
2.4G wireless device	LED for Key Y	Green light blinks slowly	Green light blinks fast	Green light stays on for 2 seconds and then turns off
Wired mode	LED for Key U	N/A	N/A	Red light stays on for 2 seconds and then turns off
Status	Indicator	Indicating mode		
Low Battery	Side LED Indicator 2	Red light blinks slowly		
Charging	Side LED Indicator 2	Steady green		
Fully Charged	Side LED Indicator 2	LED OFF		
Caps	Side LED Indicator 1	Steady white		
Lock WIN	Side LED Indicator 3	Steady white		

5075B Plus HotKeys

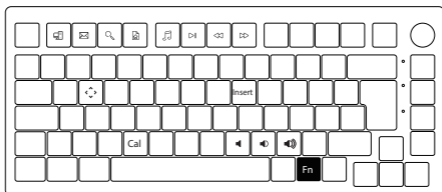


Fn+	F1	=	File Explorer
	F2		E-mail
	F3		Windows Search
	F4		Browser Homepage
	F5		Media

Fn+	F6	=	Pause/Playback
	F7		Previous Song
	F8		Next Song
	C		Calculator
	M		Mute

Fn+	<	=	Decrease Volume
	>		Increase Volume
	w		Swap W A S D with ↑ ↓ ← →

5075B Plus System Commands (Windows)

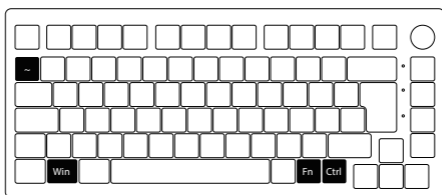

Lock Windows Key

Press Fn and
Left Win Key


Restore Factory Settings

Hold down Fn and
press ~ Key for 3S

Revert Ctrl into Menu Key


Hold down Fn and
press right Ctrl for 3S

5075B Plus System Commands (Mac)

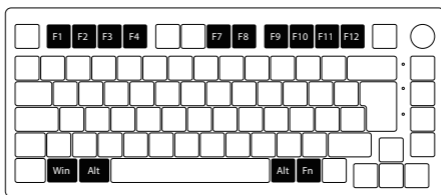


F1	Decrease display brightness	F7	Skip back (Audio)	F11	Decrease Volume
F2	Increase display brightness	F8	Pause/Play (Audio)	F12	Increase Volume
F3	Open mission control	F9	Skip forward (Audio)	Left Win	Option
F4	Activate Siri	F10	Mute	Left Alt	Command
Right Alt	Command				


5075B Plus Backlight Settings

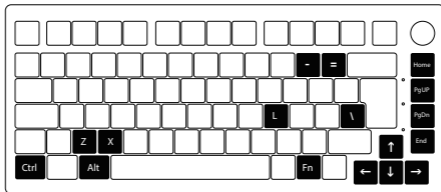

FN+-	Slower Animation	FN+Home	Effect 1, Effect 2, Effect 3, Effect 4, Effect 5
FN+=	Faster Animation	FN+PGUP	Effect 6, Effect 7, Effect 8, Effect 9, Effect 10
FN+↑	Bright	FN+End	Effect 11, Effect 12, Effect 13, Effect 14, Effect 15
FN+↓	Dim	FN+PGDW	Effect 16, Effect 17, Effect 18, Effect 19, Effect 20
FN+←	Set animation direction to left	FN+\	This shortcut allows you to set the backlight color to 7 single color with RGB loop effect
FN+→	Set animation direction to right	FN+X	Side LED animation speed cycling in 5-levels
FN+L	Light Off/On	FN+Alt	Set the side LED to 7 single color with RGB loop effect
FN+Z	Side LED brightness cycling in 5-levels		
FN+Left Ctrl	Side LED effects cycling (including OFF) in 6-levels		

5075B Plus Connection usage guide

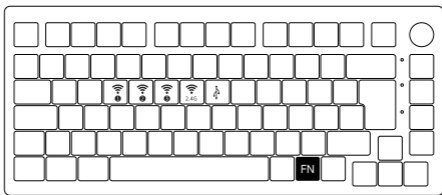

Fn+	E	Bluetooth Device 1	Short press to connect with slow flashing blue LED; Press and hold to pair device with fast flashing blue LED.	 Back Switch indicator Left: Windows (built-in power supply on) Medium: Default Mac (built-in power supply off) Right: Mac (built-in power supply on)
	R	Bluetooth Device 2		
	T	Bluetooth Device 3		
	Y	2.4G Wireless Device	Short press to connect with slow flashing green LED; The lighting effect will be restored when pairing succeeds.	
	U	Wired mode		

Bluetooth Pairing

After turning on the keyboard, press FN+E/R/T to enter Bluetooth mode. Press and hold the FN+E/R/T combination key for 3 seconds to put the keyboard in pairing mode, with the blue indicator light flashing quickly. Once the connection is established, the indicator light will stay on for 2 seconds. If the device fails to connect, the indicator light will turn off and the keyboard will enter sleep mode.

2.4G Pairing

After turning on the keyboard, press FN+Y to enter 2.4G mode. Then press and hold the FN+Y combination key for 3 seconds to enter pairing mode. Then insert the receiver, and the indicator light will flash quickly. Once pairing is successful, the LED indicator will stay on for 2 seconds. If no available device is found within 30 seconds, the LED indicator will turn off and the keyboard will enter sleep mode.

Battery Level Check

Press the Fn + Space combination keys to check the battery level. If the battery level is below 30%, the space key will show a red light. If it's between 30-50%, the space key will show an orange light. If it's between 50-70%, the space key will show a purple light. If it's between 70-90%, the space key will show a yellow light. If it's 90-100%, the space key will show a green light.

Key/Lighting Effects Customization Instruction

1. The driver can be connected and lighting and key can be customized under the three working modes of the keyboard
2. The three working modes of the keyboard can be matched to drive the music rhythm
3. Please download the Akko Cloud driver on our website
4. Users can download the driver via en.akkogear.com

AKKO Warranty and Service Statement

1. Akko provides One-Year warranty for customers in mainland China. For other regions, please contact your seller (Akko distributor) for specific warranty policy.
2. If the warranty window expires, customers need to pay for repairs. Akko will also provide instructions if users prefer to repair the keyboard by themselves. However, users shall take full responsibility for any loss happened during self-repair.
3. Disassembling the keyboard without manufacturer/seller's instruction will immediately void the warranty.
4. The return and warranty policy may vary in different platforms and are subject to the specific distributor at the time of purchase.

Company: Shenzhen Yinchen Technology Co., Ltd

Address: 33 Langbi Rd, Bitou Community 1st Industrial Zone, Bao'an District, Shenzhen, China

Tel: 0755-23216420

Website: www.akkogear.com

Origin: Shenzhen, China



WARNING:

Water and Beverages can't be poured into the Keyboard.



[instagram.com/akkogear](https://www.instagram.com/akkogear)



[facebook.com/akkogear](https://www.facebook.com/akkogear)

中国制造/Made in China



[tiktok.com/@akkogear](https://www.tiktok.com/@akkogear)

Precautions

Man-made damage is not limited to immersion, falling off, and pulling off the wires with excessive forces, etc.



www.akkogear.com

